



Model

BRAVO 125

Description

125mm wall / ceiling exhaust air fan


Application

Residential premises / Toilets / Bathrooms / Laundries / Ensuities


Technical specification

Voltage [V/50 Hz]	220-240 AC
Power [W]	16
Extract capacity [m ³ /h]	192
Noise level 3m [dBA]	37
r.p.m.	2400
Installation type	Surface
Installation site	Wall / Ceiling
Installation position	Any
DN (diameter nominal) [mm]	125
Air flow temperature [°C]	-20 - +45
Index of protection	IP 34
Casing material	ABS plastic
Front panel material	ABS plastic
Impeller material	ABS plastic
Colour	White

Characteristic curve

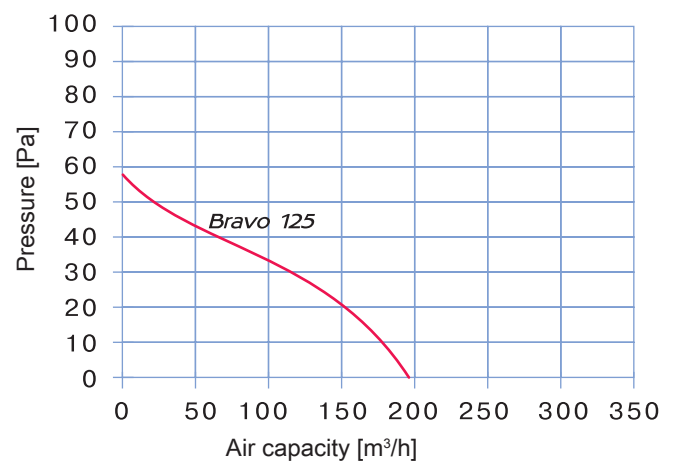

Dimensions [mm]

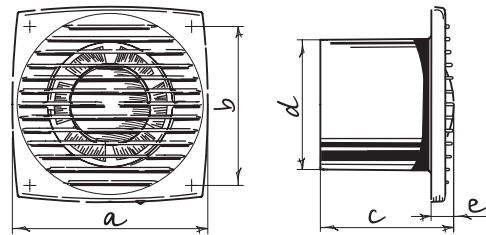

Modifications

Type	Dimensions [mm]				
	a	b	c	d	e
Bravo 125	176	144	104	125	17

Modification	Product Code
Pull cord	Bravo 125 S
Timer	Bravo 125 T
Humidity sensor	Bravo 125 H
Pull-cord switch / Timer	Bravo 125 ST
Pull-cord switch / Humidity sensor	Bravo 125 SH

Ventilation Solutions Australia (VSA) is not responsible for mistakes or printing errors and retain the right to make technical modifications without giving prior notice.

Email: info@ventilationsolutions.com.au
 Phone: 1300 998 326